




PITBULL

# PB678, PB6710 STATIC GRIZZLY


The perfect solution to removing large debris before final screening.

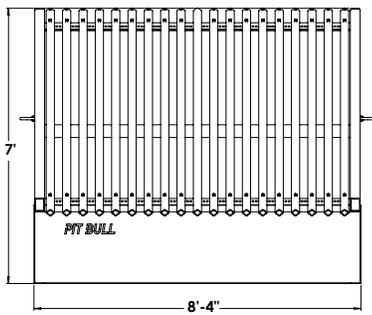

PB678

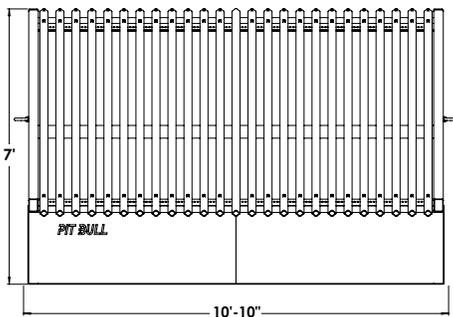

PB6710



**Our PB678 and PB6710 stand 7 feet at their highest point and can stand up to the toughest material, from rocks to demolition rubble.**

PB678 Grizzly comes standard with 18 bars set at 2-1/2" apart. PB6710 comes standard with 22 bars set at 2-1/2" apart. Just like our PB148, two bolts lock in each bar but can be easily removed or added in minutes for a larger or smaller opening. Our bars are set on edge to promote a self-cleaning action, appearing as a diamond-shaped bar minimizing the probability of material lodging between bars.

**Request a quote or demo today!**



PITBULL

# PB678 & PB6710 STATIC GRIZZLY



Easy to transport and position using standard "D" ring lift lugs



Quick easy bar removal utilizing two bolts per bar, swap bars in minutes



Built with Pitbull's rugged, tubular frame construction

## Features

- Compatible with any material handler capable of 7' dump height
- Comes standard from factory with culling bars set to 2-1/2" minus spacing
- Bars are 2" square steel tubes with full 1/4" wall thickness
- 1" spacing on bar placement holes. 1/2" square head bolts secure bars, one at each end. Bolts pass completely thru bar & support
- Structure built to last.
- Large access opening under screen deck for easy material removal
- Economical to own with minimal maintenance

## Specifications

<b>Height</b>	7' at highest tip
<b>Deck Size</b>	PB678 - 72" deep, 96" long, 84" high PB6710 - 72" deep, 123½" long, 84" high
<b>Operating Weight</b>	PB678 - 2,640 lbs PB6710 - 3,110 lbs
<b>Bars</b>	2" square structural steel tubes, 1/4" thick walls PB678 - 18 bars set 2-1/2" apart PB6710 - 22 bars set 2-1/2" apart
<b>Standard with</b>	Welded "D" rings strategically placed for easy handling

Request a quote or demo today!

