
PITBULL PB106 STATIC GRIZZLY

The perfect economical solution to removing large debris before final screening.



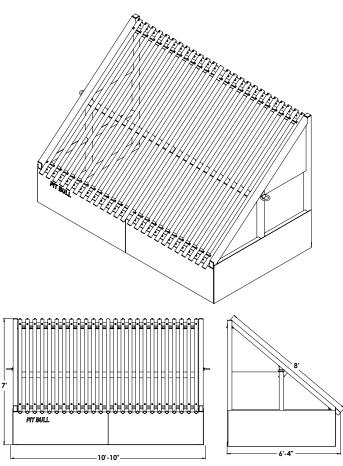

Our PB106 stands 7 feet at its highest point and can stand up to the toughest material, from coarse gravel to demolition debris.

Our PB106 Grizzly comes standard with 24 bars set at 2-1/2" apart. Just like our PB148, two retaining clamps lock in each bar, facilitating their easy removal or addition in minutes for a larger or smaller opening. Our bars are set on edge to promote a self-cleaning action, appearing as a diamond-shaped bar minimizing the probability of material lodging between bars.



Request a quote or demo today!

PITBULL **PB106 STATIC GRIZZLY**

Quick easy bar removal utilizing two clamps per bar, swap bars in minutes

> Designed for use with compact or mid-size equipment. Built with Pitbull's rugged, tubular frame construction

> > SCREENING MACHINE



transport and position using standard "D" ring lift lugs

Easy to

Features

- Compatible with any compact / mid-size material handler capable of 7' dump height
- Comes standard from factory with 24 culling bars set to 2-1/2" minus spacing
- Bars are 2" square steel tubes with full 1/4" wall thickness
- 1" spacing on bar placement holes. Retaining clamps secure bars, one at each end. Bolts pass completely thru bar & support held secure with hex lock nuts
- · Fully welded frame structure built to last
- Large access opening under screen deck for easy material removal
- · Economical to own with minimal maintenance

Specifications

Height	7' at highest tip
Deck Size	72" deep, 130" long, 84" high 82 sq. feet of screen surface
Operating Weight	3,110 lbs
Bars	2" square structural steel tubes, 1/4" thick walls 24 bars set 2-1/2" apart
Standard with	Welded "D" rings strategically placed for easy handling
PIT	

Request a quote or demo today!

LEAN. MEA