
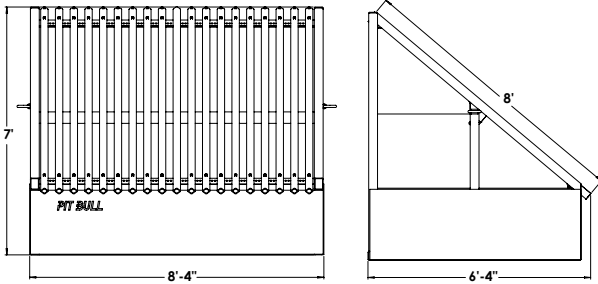
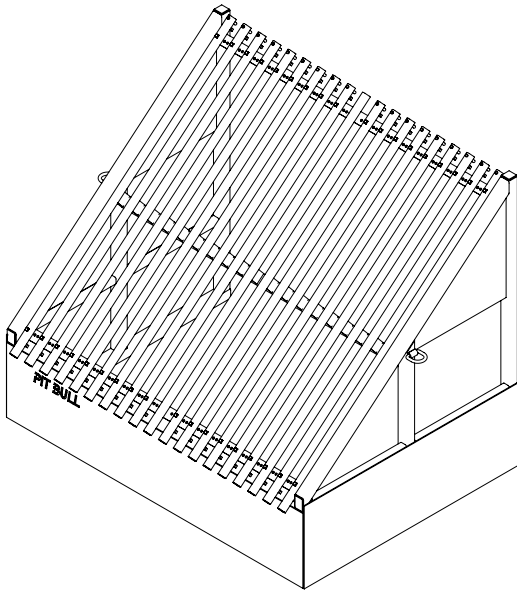


PITBULL

# PB86 STATIC GRIZZLY

The perfect economical solution to removing large debris before final screening.

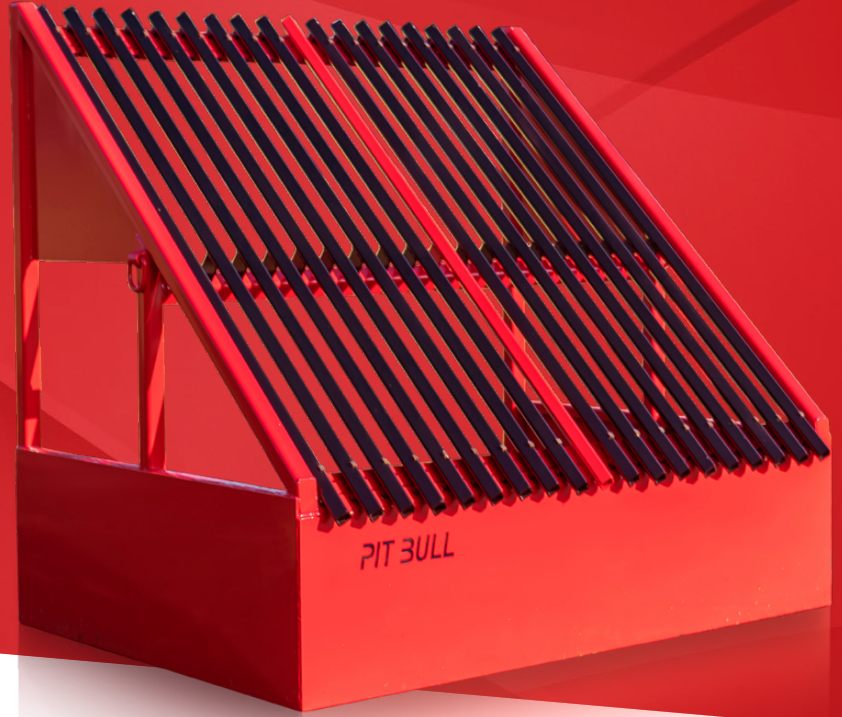

**Our PB86 stands 7 feet at its highest point and can stand up to the toughest material, from coarse gravel to demolition debris.**

Our PB86 Grizzly comes standard with 18 bars set at 2-1/2" apart. Just like our PB148, two retaining clamps lock in each bar, facilitating their easy removal or addition in minutes for a larger or smaller opening. Our bars are set on edge to promote a self-cleaning action, appearing as a diamond-shaped bar minimizing the probability of material lodging between bars.

**Request a quote or demo today!**



# PITBULL PB86 STATIC GRIZZLY



Easy to transport and position using standard "D" ring lift lugs



Quick easy bar removal utilizing two clamps per bar, swap bars in minutes



Designed for use with compact equipment. Built with a tubular frame construction

## Features

- Compatible with any compact material handler capable of 7' dump height
- Comes standard from factory with 18 culling bars set to 2-1/2" minus spacing
- Bars are 2" square steel tubes with full 1/4" wall thickness
- 1" spacing on bar placement holes. Retaining clamps secure bars, one at each end. Bolts pass completely thru bar & support held secure with hex lock nuts
- Fully welded frame structure built to last
- Large access opening under screen deck for easy material removal
- Economical to own with minimal maintenance

## Specifications

<b>Height</b>	7' at highest tip
<b>Deck Size</b>	72" deep, 100" long, 84" high 64 sq. feet of screen surface
<b>Operating Weight</b>	2,640 lbs
<b>Bars</b>	2" square structural steel tubes, 1/4" thick walls 18 bars set 2-1/2" apart
<b>Standard with</b>	Welded "D" rings strategically placed for easy handling

Request a quote or demo today!

